

# BANANZA

## BH-Series

### The Economical Unitary Infrared Heater

- Longer life provided by durable components
- Clean, quiet draft-free comfort
- Easy serviceability provided through hinged door design
- Design flexibility achieved with multiple configurations including both L- and U-tube options and broad range of burner sizes and tube lengths




**CUT ENERGY  
BILLS BY UP TO  
50%**  
with BANANZA  
[www.bananza.com](http://www.bananza.com)

**1.800.255.3416**  
**[www.bananza.com](http://www.bananza.com)**



# BANANZA® BH-Series

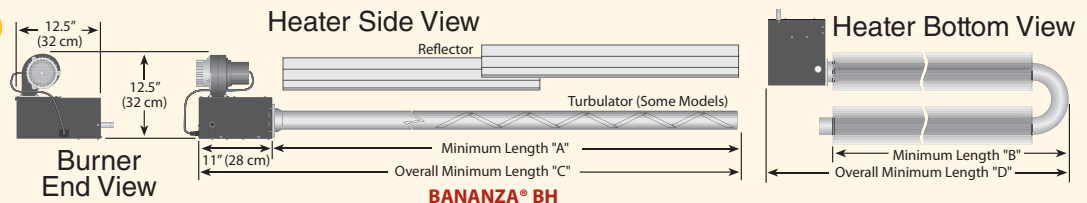

Model		BH-40	BH-60	BH-80	BH-100	BH-115	BH-125	BH-140	BH-150	BH-175	BH-200
Minimum Length of Straight Tube*	[ft, in] A	10	20	20	30	30	40	40	50	50	60
Minimum Length of U-Tube*	[ft, in] B	N/A	11, 7	11, 7	16, 7	16, 7	21, 7	21, 7	26, 7	26, 7	31, 7
Overall Minimum Length of Straight Tube*	[ft, in] C	10, 11	20, 11	20, 11	30, 11	30, 11	40, 11	40, 11	50, 11	50, 11	60, 11
Overall Minimum Length of U-Tube*	[ft, in] D	N/A	12, 6	12, 6	17, 6	17, 6	22, 6	22, 6	27, 6	27, 6	32, 6

\* For additional lengths, please see the current Installation, Operation and Service Manual.

Input (Btu/h) x (1000)		40	60	80	100	115	125	140	150	175	200
Inlet Pressure	[in wc] NG min.	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	5	5
	LPG Propane min.	11	11	11	11	11	11	11	11	11	N/A
	NG & LPG Propane max.	14	14	14	14	14	14	14	14	14	14 (NG only)
Gas Connection	NPT	½"	½"	½"	½"	½"	½"	¾"	¾"	¾"	¾"
Exhaust Flue	dia	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"
Combustion Air Inlet	dia	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"
<b>Weights</b>											
Overall Length of Tube and Accessory Packages	[ft]	10	20	30	40	50	60	70	80		
Hot Rolled or Aluminized Tube with Aluminum Reflector	[lb]	52	86	120	161	206	240	281	322		
Aluminized Tube with Stainless Steel Reflector	[lb]	66	113	152	208	265	304	360	416		
Burner	[lb]	29									
Aluminized U-Tube with Aluminum End Caps	[lb]	19									
Aluminized U-Tube with Stainless Steel End Caps	[lb]	20									
Fuel		NG or LPG Propane									
Electrical Supply		120 V, 60 Hz, 1 A									
Heat Exchanger Tubing		10 ft Sections, 4" dia, 16 Gauge, First 10 ft ALUMI-THERM® Steel Tubing [Remaining Hot Rolled or Heat Treated Aluminized Tubing]									
Exhaust Flue	dia	4"									
Reflector and End Caps		.024 Aluminum [Optional - .024 Stainless Steel Type 304]									
Control System		Fully Automatic, Three-Try, 100% Shut-Off, Direct Spark Electronic Ignition Control									
Approved As		Indoor (Vented or Unvented)									
Certification		ANSI Z83.20/CSA 2.34, 2.17, 2.20									
Warranty		Three-Year Limited (Refer to Installation, Operation and Service Manual for Details)									

## Clearances to Combustibles \* [in]

Model			BH-40		BH-60		BH-80		BH-100		BH-115/125		BH-140/150		BH-175/200	
	Horizontal	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°
	A		6	8	6	8	6	8	6	10	6	10	6	12	8	12
	B		27	8	35	8	38	8	40	8	46	8	50	8	52	8
	C		52	50	62	59	65	65	70	73	76	77	79	83	82	85
	D		27	46	35	54	38	60	40	64	46	69	50	74	52	79

\*Clearances B, C and D can be reduced by 50% for locations 25 ft (7 m) or more downstream of the burner. For other mounting options and associated clearances, complete installation, operation and service criteria, please see the current issue of the Installation, Operation and Service Manual.

### Installation Code and Annual Inspections:

All installation and service of BANANZA® equipment must be performed by a contractor qualified in the installation and service of equipment sold and supplied by Bananza and conform to all requirements set forth in the BANANZA® manuals and all applicable governmental authorities pertaining to the installation, service and operation of the equipment. To help facilitate optimum performance and safety, Bananza recommends that a qualified contractor conduct, at a minimum, annual inspections of your BANANZA® equipment and perform service where necessary, using only replacement parts sold and supplied by Bananza.

**Further Information:** Applications, engineering and detailed guidance on systems design, installation and equipment performance is available through BANANZA® representatives.

Please contact us for any further information you may require, including the Installation, Operation and Service Manual.

**This product is not for residential use.**

**This document is intended to assist licensed professionals in the exercise of their professional judgment.**

## Bananza

1100 Seven Mile Road NW  
Comstock Park, MI 49321  
Telephone: +1.616.726.8800  
Toll Free: 800.255.3416  
Fax: +1.616.726.8807