

BANANZA

BANANZA[®] BH

The Economical Unitary Infrared Heater




- Longer life provided by durable components
- Clean, quiet draft-free comfort
- Easy serviceability provided through hinged door design
- Design flexibility achieved with multiple configurations including both L- and U-tube options and broad range of burner sizes and tube lengths

**CUT ENERGY
BILLS BY UP TO
50%**
with BANANZA
www.bananza.com



BANANZA

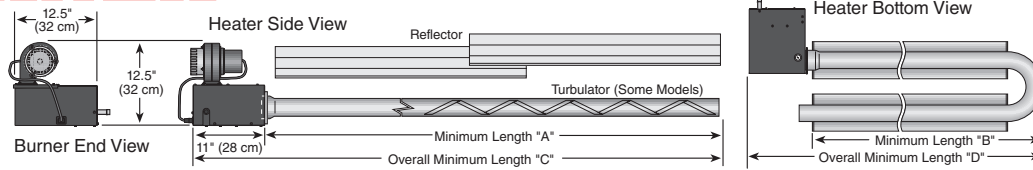

BANANZA® BH

Model		BH-40	BH-60	BH-80	BH-100	BH-115	BH-125	BH-140	BH-150	BH-175	BH-200
Minimum Length of Straight Tube*	[ft, in] A	10	20	20	30	30	40	40	50	50	60
Minimum Length of U-Tube*	[ft, in] B	N/A	11, 7	11, 7	16, 7	16, 7	21, 7	21, 7	26, 7	26, 7	31, 7
Overall Minimum Length of Straight Tube*	[ft, in] C	10, 11	20, 11	20, 11	30, 11	30, 11	40, 11	40, 11	50, 11	50, 11	60, 11
Overall Minimum Length of U-Tube*	[ft, in] D	N/A	12, 6	12, 6	17, 6	17, 6	22, 6	22, 6	27, 6	27, 6	32, 6

* For additional lengths, please see the current Installation, Operation and Service Manual.

Input (Btu/h) x (1000)		40	60	80	100	115	125	140	150	175	200
Inlet Pressure	[in wc] NG min.	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	5	5
	LPG Propane min.	11	11	11	11	11	11	11	11	11	11
	NG & LPG Propane max.	14	14	14	14	14	14	14	14	14	14
Gas Connection	NPT	½"	½"	½"	½"	½"	½"	¾"	¾"	¾"	¾"
Weights											
Overall Length of Tube and Accessory Packages	[ft]	10	20	30	40	50	60	70	80		
Hot Rolled or Aluminized Tube with Aluminum Reflector	[lb]	52	86	120	161	206	240	281	322		
Aluminized Tube with Stainless Steel Reflector	[lb]	66	113	152	208	265	304	360	416		
Burner	[lb]	29									
Aluminized U-Tube with Aluminum End Caps	[lb]	19									
Aluminized U-Tube with Stainless Steel End Caps	[lb]	20									
Fuel		NG or LPG Propane									
Electrical Supply		120 V, 60 Hz, 1 A									
Heat Exchanger Tubing		10 ft Sections, 4" dia, 16 Gauge, First 10 ft ALUMI-THERM® Steel Tubing [Remaining Hot Rolled or Heat Treated Aluminized Tubing]									
Exhaust Flue	dia	4"									
Reflector and End Caps		.024 Aluminum [Optional - .024 Stainless Steel Type 304]									
Control System		Fully Automatic, Three-Try, 100% Shut-Off, Direct Spark Electronic Ignition Control									
Approved As		Indoor (Vented or Unvented)									
Certification		ANSI Z83.20/CSA 2.34, 2.17, 2.20									
Warranty		Three-Year Limited (Refer to Installation, Operation and Service Manual for Details)									

Clearances to Combustibles *[in]

Model		BH-40		BH-60		BH-80		BH-100		BH-115/125		BH-140/150		BH-175/200	
	Horizontal 45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°
	A	6	8	6	8	6	8	6	10	6	10	6	12	8	12
	B	27	8	35	8	38	8	40	8	46	8	50	8	52	8
	C	52	50	62	59	65	65	70	73	76	77	79	83	82	85
	D	27	46	35	54	38	60	40	64	46	69	50	74	52	79

*Clearances B, C and D can be reduced by 50% for locations 25 ft or more downstream of the burner. For other mounting options and associated clearances, complete installation, operation and service criteria, please see the current issue of the Installation, Operation and Service Manual.

Installation Code and Annual Inspections: All installations and service of BANANZA® products must be performed by a contractor qualified in the installation and service of products sold and supplied by Bananza and conform to all requirements set forth in the BANANZA® manuals and all applicable governmental authorities pertaining to the installation, service and operation of the equipment. To help facilitate optimum performance and safety, Bananza recommends that a qualified contractor annually inspect your BANANZA® products and perform service where necessary, using only replacement parts sold and supplied by Bananza.

Further Information: Applications, engineering and detailed guidance on systems design, installation and product performance is available through BANANZA® representatives. Please contact us for any further information you may require, including the Installation, Operation and Service Manual.

This product is not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgement.

BANANZA

1100 Seven Mile Road NW
Comstock Park, MI 49321
Telephone: 616.728.8800
Toll Free: 800.255.3416
Fax: 616.726.8807

www.bananza.com

© 2006 Roberts-Gordon, LLC All rights reserved. No part of this work covered by the copyrights herein may be reproduced or copied in any form or by any means – graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems – without written permission of Roberts-Gordon, LLC.

Printed in U.S.A.

BNBHSNA

1206 Rev B